


EOL PUP FOOD



透明聚醚TPU管壁，象牙色防震硬质PVC螺旋增强 内壁光滑，外壁波纹状；耐磨性优异，柔韧易弯曲，耐微生物耐水解，优异的机械性能；壁厚范围：0.8-1.2mm；可根据需求定制防静电带铜线版本。


• 适用于食品行业中抽吸输送液体和干性食品，如：谷物，动物饲料，糖，面粉等；也适用于油脂类食品。
符合美国FDA Reg. cfr 21-Item 177.2600 (dry (d), aqueous (e) and fatty (f) food) 和欧盟EU Regulation 10/2011 (classes A, B, C, D2, E)食品级标准。

Transparent ether based TPU wall, with ivory anti-shock rigid PVC spiral. Smooth inside, corrugated outside. It is extremely resistant to abrasion and flexion as well as to Hydrolysis and microbes attacks. This hose features high mechanical properties. TPU wall thickness from 0,8 to 1,2 mm.

Antistatic version with copper wire on request.

• Food industry: suction of liquids and dry food such as grains, animal feed, sugar, flour etc. Suitable for fatty foods.

Food grade according to FDA Reg. cfr 21-Item 177.2600 (dry (d), aqueous (e) and fatty (f) food) and to the EU Regulation 10/2011 (classes A, B, C, D2, E).

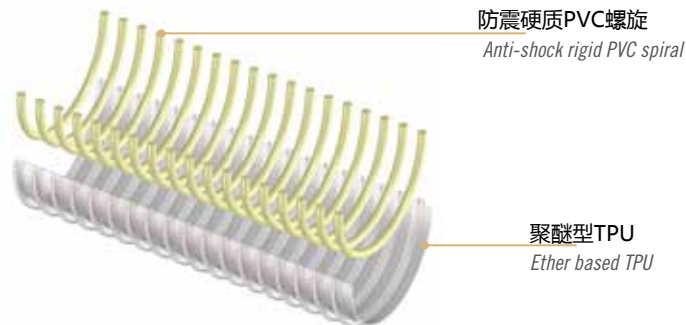

防震硬质PVC螺旋

Anti-shock rigid PVC spiral

聚醚型TPU

Ether based TPU

技术参数 / Technical data

代码	内径	最小壁厚	最大壁厚	重量	耐负压	弯曲半径	每卷长度	体积
Code	Ins. Ø	Min wall th.	Max. wall th.	Weight	Vac.	Bending	Coil lgth.	Vol.
	mm	mm	mm	g/m	m H ₂ O	mm	m	m ³
EP 01 025.0 000.0	25*	0,8	3,3	210	3,5	80	30	0,046
EP 01 030.0 000.0	30*	0,8	3,3	240	3,5	100	30	0,070
EP 01 032.0 000.0	31,8*	0,8	3,3	260	3	110	30	0,074
EP 01 035.0 000.0	35*	0,8	3,5	280	3	120	30	0,081
EP 01 038.0 000.0	38,1	0,8	3,5	300	3	130	30	0,087
EP 01 040.0 000.0	40	1,0	3,6	350	3	140	30	0,121
EP 01 045.0 000.0	45*	1,0	3,9	440	3	160	30	0,135
EP 01 052.0 000.0	50,8	1,0	4,3	550	3	175	30	0,257
EP 01 055.0 000.0	55*	1,0	4,3	590	3	190	30	0,275
EP 01 060.0 000.0	60	1,0	4,3	640	3	200	30	0,296
EP 01 063.0 000.0	63,5	1,0	4,3	670	3	230	30	0,311
EP 01 070.0 000.0	70	1,0	4,8	750	3	250	30	0,344
EP 01 076.0 000.0	76,2	1,0	4,8	810	2,5	270	30	0,371
EP 01 080.0 000.0	80	1,0	5,2	900	2,5	290	30	0,694
EP 01 090.0 000.0	90	1,0	5,4	1060	2,5	360	30	0,774
EP 01 100.0 000.0	100	1,0	5,9	1240	2,5	400	30	0,859
EP 01 102.0 000.0	102	1,0	5,9	1270	2,5	400	30	0,874
EP 01 110.0 000.0	110*	1,0	6,1	1380	2,5	440	30	0,938
EP 01 120.0 000.0	120	1,0	6,1	1500	2,5	470	30	1,015
EP 01 127.0 000.0	127	1,0	6,1	1580	2,5	500	30	1,425
EP 01 130.0 000.0	130*	1,0	6,1	1620	2,5	520	30	1,456
EP 01 140.0 000.0	140*	1,0	6,2	1780	2	570	30	1,219
EP 01 150.0 000.0	151,5	1,0	6,6	1980	2	600	20	1,318
EP 01 152.0 000.0	152,8*	1,0	6,6	2000	2	600	20	1,325
EP 01 203.0 000.0	203,2*	1,2	9,2	2950	1	400	20	1,776
EP 01 254.0 000.0	254*	1,2	9,2	3670	1	500	10	1,397
EP 01 305.0 000.0	304,8*	1,2	9,2	4380	0,8	610	10	1,657

* 如有需求，请与我们的销售办公室联系，以获得更多的信息和数据 / *Available on request, contact our sales office for more info and quantities

以上报告的技术数据均在温度23°C，50%湿度下测量的 / The technical data here reported were measured at 23°C with 50% humidity