

EOLO SE




蓝色超弹增塑型PVC软管，象牙色防震硬质PVC螺旋增强。内壁光滑，外壁波纹状；优异的机械性能，低温下仍旧柔韧；可根据需求定制防静电版本。

- 工业和家用真空吸尘器和空调设备中抽吸烟雾和其他气体等。

Blue super elastic plasticized PVC hose reinforced with rigid anti-shock PVC spiral. Inside smooth, outside corrugated. Particularly flexible at low temperatures, high mechanical resistance. Antistatic version with copper wire on request.

- Industrial and domestic vacuum cleaners, air conditioning plants and suction of fumes, gases.

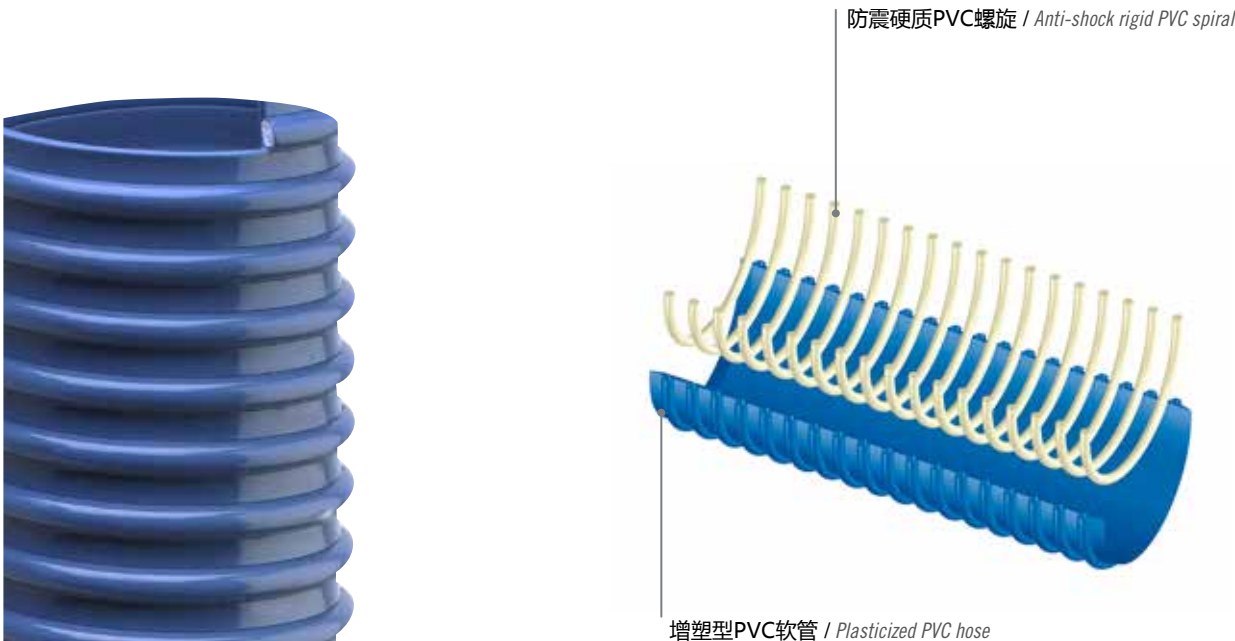

增塑型PVC软管 / Plasticized PVC hose

技术参数 / Technical data

代码 Code	内径 Ins. Ø	最小壁厚 Min wall th.	最大壁厚 Max wall th.	重量 Weight	弯曲半径 Bending	耐负压 Vac.	每卷长度 Coil lgth.	体积 Vol.
	mm	mm	mm	g/m	mm	m H ₂ O	m	m ³
EE 01 025.0 000.0	25*	1,2	2,6	170	80	6	50	0,072
EE 01 030.0 000.0	30*	1,4	3,0	250	100	6	50	0,115
EE 01 032.0 000.0	31,8*	1,4	3,1	280	110	6	50	0,122
EE 01 038.0 000.0	38,1*	1,5	3,2	330	130	5	50	0,199
EE 01 050.0 000.0	50*	1,6	3,9	530	175	5	50	0,333
EE 01 052.0 000.0	50,8*	1,6	3,9	540	175	5	50	0,338
EE 01 063.0 000.0	63,5*	2,0	4,6	860	220	5	50	0,523
EE 01 076.0 000.0	76,2*	2,0	5,2	1070	270	5	50	0,624
EE 01 102.0 000.0	102*	2,1	5,6	1420	400	4,5	30	0,869
EE 01 127.0 000.0	127*	2,2	6,5	2070	500	4,5	30	1,434
EE 01 150.0 000.0	151,5*	2,5	7,3	2820	600	4	20	1,329
EE 01 152.0 000.0	152,4*	2,5	7,4	2880	600	4	20	1,338
EE 01 200.0 000.0	200*	2,7	8,0	3670	800	3,5	20	1,728
EE 01 203.0 000.0	203,2*	2,7	8,0	3730	800	3,5	20	1,754
EE 01 250.0 000.0	250*	2,8	8,4	4890	1250	3	10	2,134

*如有需求，请联系我们的销售办公室，以获得更多的信息和数据 / *Available on request, contact our sales office for more info and quantities

以上技术数据均在温度23°C，50%湿度下测量 / The technical data here reported were measured at 23°C with 50% humidity