

SILDUCT 2S




+250°C
-70°C
峰值/peaks
310°C

双层玻璃纤维织物覆硅胶涂层软管，内嵌镀铜钢丝螺旋增强。外缠两根玻璃纤维绳。

- 适用于高温环境，通风系统和工厂中抽吸焊接烟雾和高温废气（如：塑料和汽车行业）。

Flexible hose made of two plies of silicone coated glass fabric, with an embedded bronze plated steel wire helix. Double outer glass cord.

- Suction of welding fumes and gases at high temperatures, ventilation systems and industrial suction plants (ex. plastic and automotive).

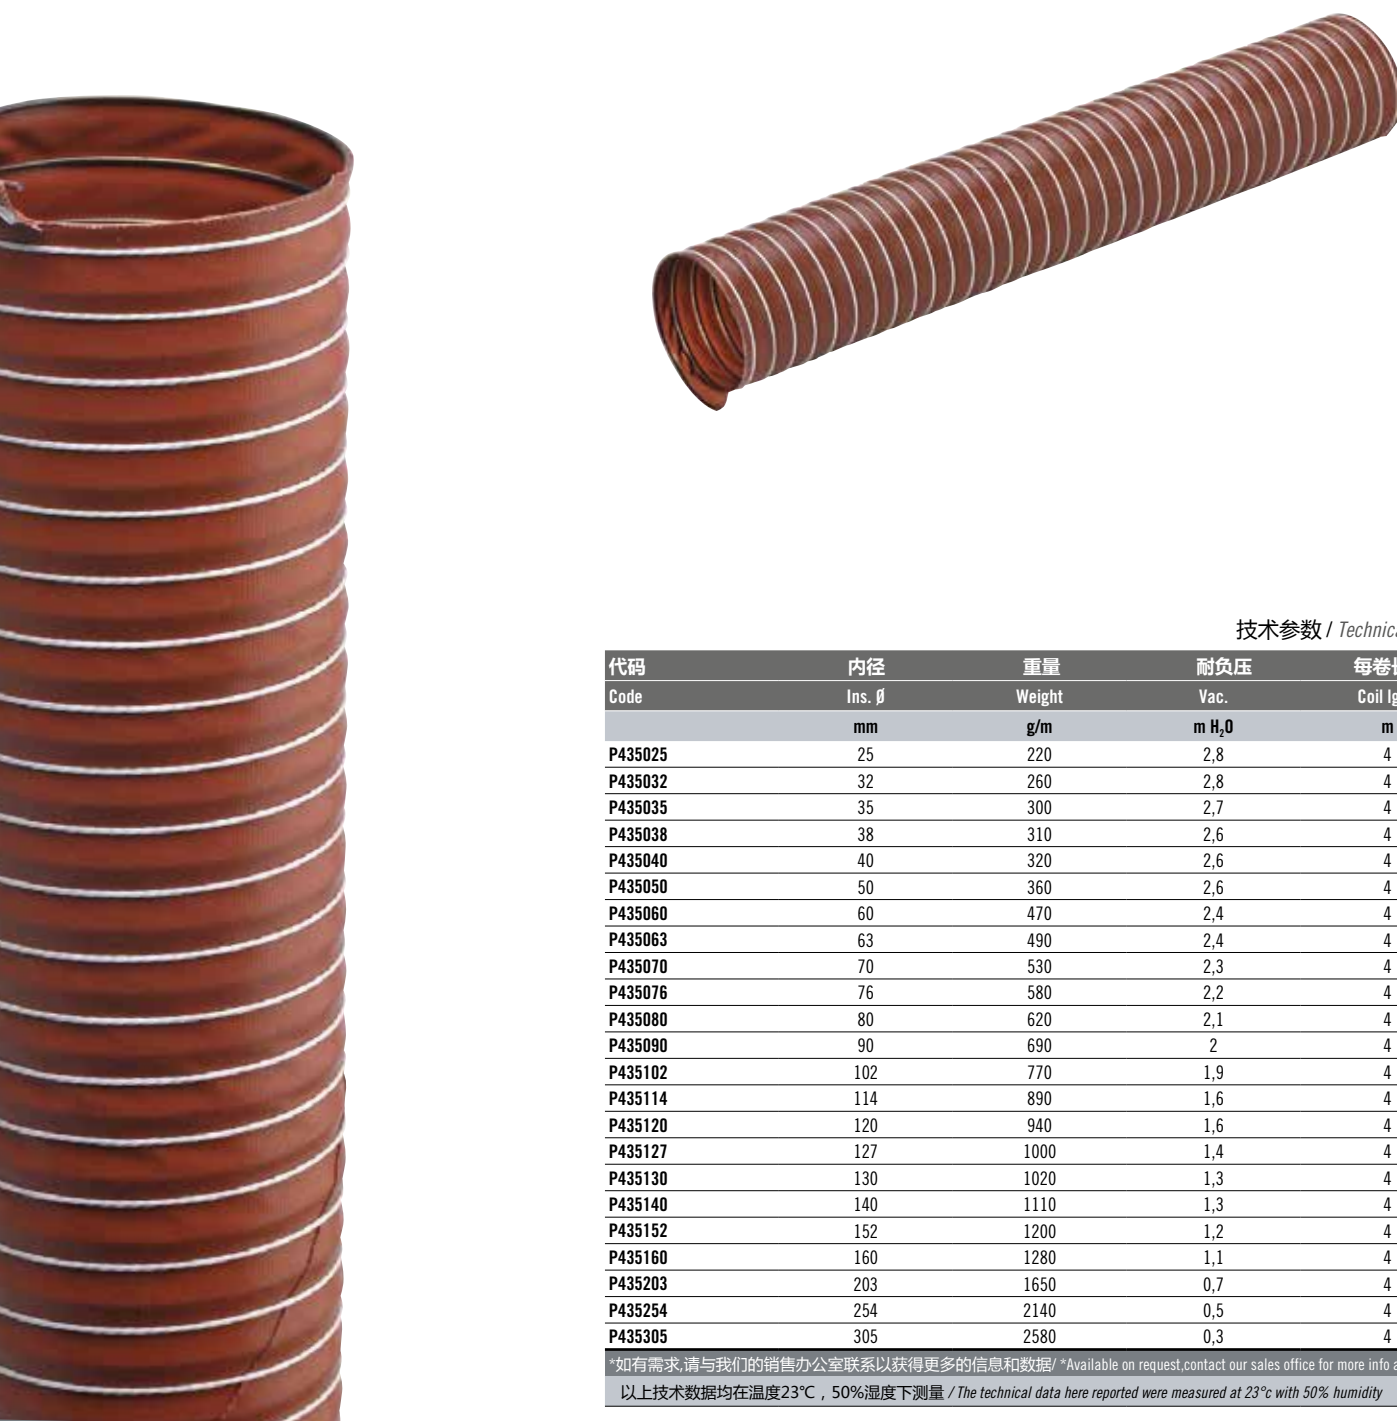

技术参数 / Technical data

代码	内径	重量	耐负压	每卷长度
Code	Ins. Ø	Weight	Vac.	Coil lgth.
	mm	g/m	m H ₂ O	m
P435025	25	220	2,8	4
P435032	32	260	2,8	4
P435035	35	300	2,7	4
P435038	38	310	2,6	4
P435040	40	320	2,6	4
P435050	50	360	2,6	4
P435060	60	470	2,4	4
P435063	63	490	2,4	4
P435070	70	530	2,3	4
P435076	76	580	2,2	4
P435080	80	620	2,1	4
P435090	90	690	2	4
P435102	102	770	1,9	4
P435114	114	890	1,6	4
P435120	120	940	1,6	4
P435127	127	1000	1,4	4
P435130	130	1020	1,3	4
P435140	140	1110	1,3	4
P435152	152	1200	1,2	4
P435160	160	1280	1,1	4
P435203	203	1650	0,7	4
P435254	254	2140	0,5	4
P435305	305	2580	0,3	4

*如有需求,请与我们的销售办公室联系以获得更多的信息和数据/ *Available on request,contact our sales office for more info and quantities

以上技术数据均在温度23°C，50%湿度下测量 / The technical data here reported were measured at 23°C with 50% humidity