

VULCANO PU Z




聚酯型聚氨酯材质，镀锌螺旋钢丝增强 壁厚范围0.35至0.50毫米，非常柔韧且易操作，可轴向压缩（约5：1），益于仓储及运输成本；软管两端螺旋钢丝接地可导电。

•适用于木工行业，除尘系统，蒸汽设备及小型工业清洁装置，也可用作保护套。

Transparent ester based TPU hose reinforced with a zinc plated steel spiral; wall thickness from 0.35 mm to 0.50 mm. Very flexible, and axially compressible (about 5:1) for easy handling and cost effective stocking and transporting. It can be made conductive by earthing the steel spiral.

• Woodworking industry, dust extraction, vapours, small industrial cleaning and light suction plants. It can be used as protection sleeve.

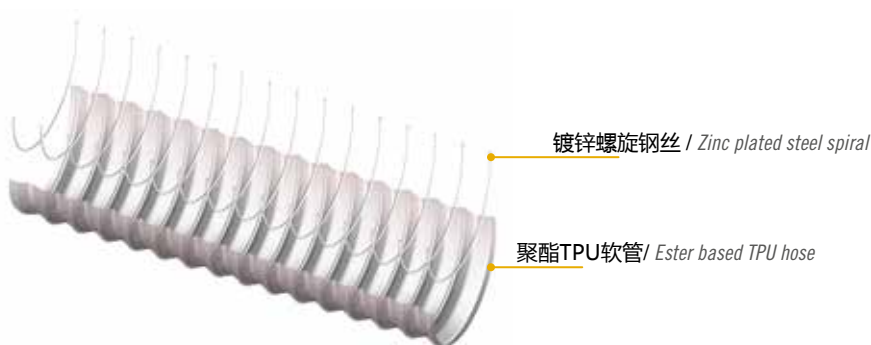

技术参数 / Technical data

型号 Code	内径 Ø Int.	最小壁厚 Min wall th.	重量 Weight	弯曲半径 Bending	耐负压 Vac.	每卷长度 Coil lgth.	体积 Vol.	桥式卡箍 W2 double bridge W2
	mm	mm	g/m	mm	m H ₂ O	m	m ³	
VZ 01 051.0 000.0	51	0,35	230	26	0,40	20	0,110	-
VZ 01 060.0 000.0	60	0,35	275	30	0,40	20	0,120	-
VZ 01 063.0 000.0	63	0,35	285	32	0,40	20	0,140	-
VZ 01 065.0 000.0	65*	0,35	295	33	0,40	20	0,190	-
VZ 01 070.0 000.0	70	0,35	360	35	0,40	20	0,200	-
VZ 01 076.0 000.0	76	0,35	385	38	0,40	20	0,220	F2 W2 076.090.0
VZ 01 080.0 000.0	80	0,35	405	40	0,40	20	0,230	
VZ 01 090.0 000.0	90	0,35	455	45	0,40	20	0,250	
VZ 01 100.0 000.0	100	0,40	510	50	0,30	15	0,320	F2 W2 100.0 127.0
VZ 01 102.0 000.0	102	0,40	520	51	0,30	15	0,320	
VZ 01 110.0 000.0	110	0,40	560	55	0,30	15	0,350	
VZ 01 120.0 000.0	120	0,40	605	60	0,25	15	0,370	F2 W2 130.0 190.0
VZ 01 127.0 000.0	127	0,40	640	64	0,25	15	0,390	
VZ 01 130.0 000.0	130	0,40	660	65	0,20	15	0,410	
VZ 01 140.0 000.0	140	0,40	710	70	0,20	15	0,440	F2 W2 200.0 230.0
VZ 01 150.0 000.0	150	0,40	755	75	0,20	15	0,700	
VZ 01 152.0 000.0	152	0,40	765	76	0,20	15	0,710	
VZ 01 160.0 000.0	160	0,45	895	80	0,15	15	0,750	F2 W2 250.0 330.0
VZ 01 180.0 000.0	180	0,45	1005	90	0,15	15	0,840	
VZ 01 200.0 000.0	200	0,45	1110	100	0,10	15	1,100	
VZ 01 203.0 000.0	203	0,45	1125	102	0,10	15	1,110	F2 W2 350.0 410.0
VZ 01 210.0 000.0	210*	0,45	1160	105	0,10	10	1,150	
VZ 01 220.0 000.0	220	0,45	1215	110	0,10	10	1,200	
VZ 01 228.0 000.0	228*	0,45	1260	114	0,10	10	1,240	F2 W2 500.0 600.0
VZ 01 250.0 000.0	250	0,50	1310	125	0,10	10 压缩	0,154	
VZ 01 254.0 000.0	254	0,50	1330	127	0,10	10 压缩	0,159	
VZ 01 279.0 000.0	279*	0,50	1460	140	0,08	10 压缩	0,190	F2 W2 500.0 600.0
VZ 01 300.0 000.0	300	0,50	1565	150	0,08	10 压缩	0,218	
VZ 01 305.0 000.0	305	0,50	1590	153	0,08	10 压缩	0,225	
VZ 01 315.0 000.0	315*	0,50	1640	158	0,07	10 压缩	0,240	F2 W2 500.0 600.0
VZ 01 350.0 000.0	350	0,50	1815	175	0,07	可定制/on request		
VZ 01 400.0 000.0	400	0,50	2125	200	0,06	可定制/on request		
VZ 01 500.0 000.0	500*	0,50	2925	250	0,06	可定制 (最长6米) On request (max 6m)		-

*可根据要求提供，请联系我们的销售办事处以获取更多信息和数量/ *Available on request, contact our sales office for more info and quantities

此处报告的技术数据是在温度23°C和50%湿度下测量的。/ The technical data here reported were measured at 23°C with 50% humidity