


VULCANO PU ZR



聚酯型聚氨酯材质，镀铜钢丝螺旋增强。壁厚范围0.35毫米至0.50毫米。优异的柔韧性和轴向可压缩性（约5：1），易于操作，益于仓储和运输成本；软管两端螺旋钢丝接地可导电。
 ●适用于木工行业，除尘系统，蒸汽设备及小型工业清洁装置；也可用作保护套。

Transparent ester based TPU hose reinforced with a copper plated steel spiral; wall thickness from 0.35 mm to 0.50 mm. Very flexible and axially compressible (about 5:1), for easy handling and cost effective stocking and transporting. It can be made conductive by earthing the steel spiral.

• Woodworking industry, dust extraction, vapours, small industrial cleaning and light suction plants. It can be used as protection sleeve.

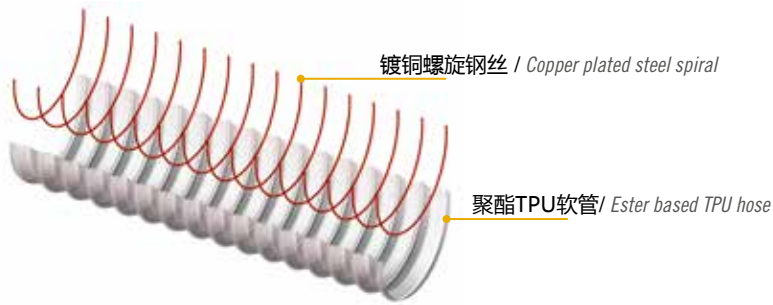

技术参数 / Technical data

型号 Code	内径 Ø Int.	最小壁厚 Min wall th.	重量 Weight	弯曲半径 Bending	耐负压 Vac.	每卷长度 Coil lgth.	体积 Vol.	桥式卡箍 W2 double bridge W2
	mm	mm	g/m	mm	m H ₂ O	m	m ³	
ZR 01 040.0 000.0	40*	0,35	160	20	0,4	20	0,070	-
ZR 01 050.0 000.0	50	0,35	195	25	0,4	20	0,110	-
ZR 01 060.0 000.0	60	0,35	240	30	0,4	20	0,120	-
ZR 01 063.0 000.0	63	0,35	250	32	0,4	20	0,130	-
ZR 01 065.0 000.0	65*	0,35	260	33	0,4	20	0,140	-
ZR 01 070.0 000.0	70	0,35	360	35	0,4	20	0,200	-
ZR 01 076.0 000.0	76	0,35	385	38	0,4	20	0,220	F2 W2 076.0 090.0
ZR 01 080.0 000.0	80	0,35	405	40	0,4	20	0,230	
ZR 01 090.0 000.0	90	0,35	455	45	0,4	20	0,250	
ZR 01 100.0 000.0	100	0,40	475	50	0,3	15	0,320	F2 W2 100.0 127.0
ZR 01 102.0 000.0	102	0,40	520	51	0,3	15	0,320	
ZR 01 110.0 000.0	110	0,40	560	55	0,3	15	0,350	
ZR 01 120.0 000.0	120	0,40	605	60	0,25	15	0,370	F2 W2 130.0 190.0
ZR 01 127.0 000.0	127	0,40	640	64	0,25	15	0,390	
ZR 01 130.0 000.0	130	0,40	660	65	0,2	15	0,410	
ZR 01 140.0 000.0	140	0,40	710	70	0,2	15	0,440	F2 W2 200.0 230.0
ZR 01 150.0 000.0	150	0,40	755	75	0,2	15	0,700	
ZR 01 152.0 000.0	152	0,40	765	76	0,2	15	0,710	
ZR 01 160.0 000.0	160	0,40	895	80	0,15	15	0,750	F2 W2 250.0 330.0
ZR 01 180.0 000.0	180	0,40	1005	90	0,15	15	0,840	
ZR 01 200.0 000.0	200	0,40	1110	100	0,1	15	1,100	
ZR 01 203.0 000.0	203*	0,45	1125	102	0,1	15	1,110	F2 W2 250.0 330.0
ZR 01 220.0 000.0	220	0,45	1215	110	0,1	15	1,200	
ZR 01 228.0 000.0	228*	0,45	1260	114	0,1	10	1,240	
ZR 01 250.0 000.0	250	0,45	1310	125	0,1	10 压缩	0,154	F2 W2 350.0 410.0
ZR 01 254.0 000.0	254*	0,45	1330	127	0,1	10 压缩	0,159	
ZR 01 279.0 000.0	279*	0,45	1460	140	0,08	10 压缩	0,190	
ZR 01 300.0 000.0	300	0,45	1565	150	0,08	10 压缩	0,218	F2 W2 350.0 410.0
ZR 01 305.0 000.0	305*	0,45	1590	153	0,08	10 压缩	0,225	
ZR 01 315.0 000.0	315*	0,50	1640	158	0,08	10 压缩	0,240	
ZR 01 350.0 000.0	350*	0,50	1815	175	0,07	可定制/on request		F2 W2 350.0 410.0
ZR 01 400.0 000.0	400*	0,50	2125	200	0,06	可定制/on request		
ZR 01 500.0 000.0	500*	0,50	2925	250	0,06	可定制 (最长6米) /On request (max 6m)		

*如有需求，请联系我们销售办事处以获取更多信息和数据 / *Available on request, contact our sales office for more info and quantities

以上报告的技术数据是在温度23°C和50%湿度下测量的 / The technical data here reported were measured at 23°C with 50% humidity