

ZEUS PU FOOD




透明聚醚型聚氨酯材质，象牙色防震硬质PVC螺旋增强。内壁光滑，外壁波纹状，柔韧轻巧；优异的机械性能：耐磨损，耐弯曲，耐微生物，耐水解。壁厚范围1.2mm-2.0mm；可根据需求提供防静电带铜线版本。适用于抽吸输送食品粉末，动物饲料，多种颗粒剂以及研磨性粉末（糖，盐，干果等）。符合美国FDA Reg. Cfr 21-Item 17.2600 (aqueous and fatty food)和欧盟EU Reg. 10/2011 (classes A, B, C, D2, E)食品级标准。

Transparent ether based TPU wall, with ivory anti-shock rigid PVC spiral. Smooth inside, corrugated outside. It is extremely resistant to abrasion and flexion as well as to Hydrolysis and microbes attacks. This hose features high mechanical properties. PU wall thickness from 1,2 mm to 2,0 mm. Antistatic version with copper wire on request.

- Suction and delivery of food grade powders, animal feed, granules different size and abrasion powder, such as sugar, salt and dry fruit.

Food grade according to FDA Reg. Cfr 21-Item 17.2600 (aqueous and fatty food) and to EU Reg. 10/2011 (classes A, B, C, D2, E).

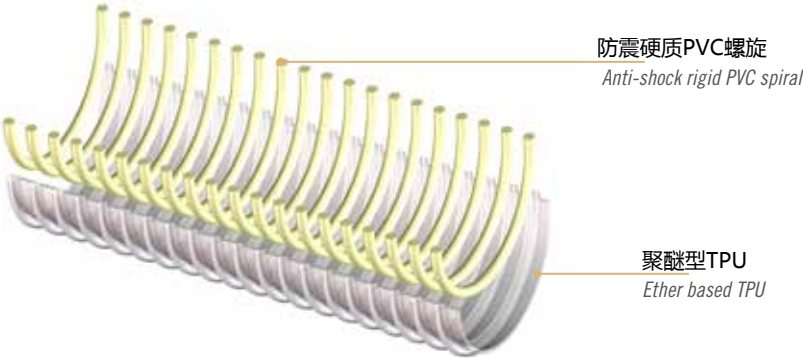

技术参数 / Technical data

代码	内径	最小壁厚	最大壁厚	重量	耐负压	弯曲半径	每卷长度	体积
Code	Ins. Ø	Min wall th.	Max. wall th.	Weight	Vac.	Bending	Coil lgth.	Vol.
	mm	mm	mm	g/m	m H ₂ O	mm	m	m ³
ZE 01 030.0 000.0	30*	1,2	3,7	320	9	130	30	0,096
ZE 01 032.0 000.0	31,8	1,2	3,8	350	9	140	30	0,101
ZE 01 035.0 000.0	35*	1,3	4,0	380	9	160	30	0,110
ZE 01 038.0 000.0	38,1	1,3	4,0	420	9	180	30	0,118
ZE 01 040.0 000.0	40	1,5	4,3	500	9	190	30	0,124
ZE 01 045.0 000.0	45*	1,5	4,4	570	8	200	30	0,138
ZE 01 052.0 000.0	50,8	1,5	4,8	700	8	215	30	0,261
ZE 01 055.0 000.0	55*	1,5	4,9	780	8	225	30	0,280
ZE 01 060.0 000.0	60	1,5	5,0	870	8	230	30	0,302
ZE 01 063.0 000.0	63,5	1,5	5,0	920	8	240	30	0,318
ZE 01 065.0 000.0	65*	1,5	5,0	940	8	240	30	0,324
ZE 01 070.0 000.0	70	1,5	5,3	950	8	250	30	0,348
ZE 01 076.0 000.0	76,2	1,7	5,5	1120	8	270	30	0,377
ZE 01 080.0 000.0	80	2,0	5,9	1260	7	290	30	0,529
ZE 01 090.0 000.0	90	2,0	5,9	1410	7	380	30	0,521
ZE 01 100.0 000.0	100	2,0	6,3	1600	7	420	30	0,865
ZE 01 102.0 000.0	102	2,0	6,3	1630	7	420	30	0,880
ZE 01 110.0 000.0	110*	2,0	7,6	2220	6,5	450	30	0,962
ZE 01 120.0 000.0	120	2,0	7,6	2410	6,5	480	30	1,622
ZE 01 127.0 000.0	127	2,0	7,6	2540	6,5	530	30	1,706
ZE 01 150.0 000.0	151,5	2,0	8,1	3110	6	800	20	1,339

* 如有需求，请与我们的销售办公室联系，以获得更多的信息和数据 / *Available on request,contact our sales office for more info and quantities
以上技术数据均在温度23°C，50%湿度下测量 / The technical data here reported were measured at 23°C with 50% humidity