


BACCO FF



半透明PVC软管，红色防震硬质PVC塑筋螺旋增强 内壁光滑；坚固柔韧耐承载；食品级硬质塑筋螺旋，食品级PVC软管。可根据要求提供防静电带铜丝版本。


• 食品行业：抽吸输送常规液体（饮料，果汁，醋，葡萄酒以及酒精浓度高达50%的烈酒）。

符合欧盟 EU Reg.10/2011 (classes A, B, C, D1)食品级标准。

Transparent PVC hose with a red anti-shock rigid PVC spiral. Smooth inside, strong and resistant to loads although flexible. The hard plastic helix is food grade as well as the wall, making bacco a totally food hose. Antistatic version with copper wire on request.

• Food industry: suction and delivery of liquids in general (beverages, juices, vinegar, wines and liquours with alcohol concentration up to 50%).

Food grade according to EU Reg.10/2011 (classes A, B, C, D1).

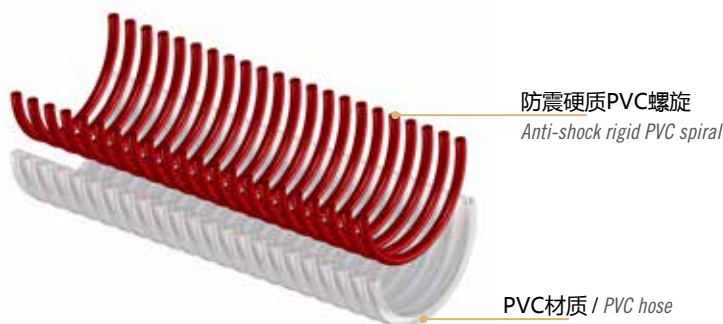

技术参数 / Technical data

代码 Code	内径 Ins. Ø	最小壁厚 Min wall th.	最大壁厚 Max. wall th.	重量 Weight	工作压 WP	爆破压 BP	负压 Vac.	弯曲半径 Bending	每卷长度 Coil lgth.	体积 Vol.
	mm	mm	mm	g/m	bar	bar	m H ₂ O	mm	m	m ³
BF 01 019.0 000.0	19*	3,2	3,5	290	9	27	10	110	50	0,084
BF 01 020.0 000.0	20	3,2	3,5	300	9	27	10	110	50	0,086
BF 01 025.0 000.0	25	3,3	3,7	390	8	24	10	170	50	0,104
BF 01 030.0 000.0	30	3,5	3,9	490	8	24	10	190	50	0,121
BF 01 032.0 000.0	31,8	3,5	3,9	510	7	21	10	230	50	0,152
BF 01 035.0 000.0	35	3,7	4,2	590	7	21	10	230	50	0,194
BF 01 038.0 000.0	38,1	4,1	4,5	710	7	21	10	260	50	0,211
BF 01 040.0 000.0	40	4,1	4,6	750	7	21	10	270	50	0,220
BF 01 045.0 000.0	45*	4,4	4,9	910	7	21	10	310	50	0,316
BF 01 050.0 000.0	50	4,7	5,3	1090	6	18	10	350	50	0,524
BF 01 052.0 000.0	50,8	4,7	5,3	1100	6	18	10	350	50	0,530
BF 01 055.0 000.0	55*	5,0	5,5	1260	6	18	10	370	50	0,570
BF 01 060.0 000.0	60	5,2	5,8	1440	6	18	10	415	50	0,619
BF 01 063.0 000.0	63,5*	5,5	6,1	1620	6	18	10	440	50	0,654
BF 01 070.0 000.0	70*	5,6	6,3	1780	5	15	10	480	50	0,846
BF 01 076.0 000.0	76,2	5,7	6,3	1950	5	15	10	525	50	0,909
BF 01 080.0 000.0	80	6,1	6,8	2180	5	15	10	555	30	0,719
BF 01 090.0 000.0	90*	6,4	7,1	2570	5	15	10	630	30	1,067
BF 01 100.0 000.0	100	7,3	8,1	3270	5	15	9	695	30	1,190
BF 01 102.0 000.0	102	7,3	8,1	3330	5	15	9	695	30	1,210
BF 01 110.0 000.0	110*	7,4	8,2	3610	4	12	9	780	30	1,517
BF 01 120.0 000.0	120	7,8	8,6	4160	4	12	9	900	30	1,646
BF 01 127.0 000.0	127*	7,7	8,6	4350	4	12	9	1000	30	1,730
BF 01 150.0 000.0	151,5*	9,3	10,3	6340	4	12	8,5	1300	20	1,666
BF 01 152.0 000.0	152,8*	9,3	10,3	6390	4	12	8,5	1300	20	1,679

* 如有需求，请与我们的销售办事处联系，以获得更多的信息和数据 / *Available on request, contact our sales office for more info and quantities

以上数据均在温度23°C和相对湿度50%下测量 / The technical data here reported were measured at 23°C with 50% humidity