

PLUTONE PK




化学工业抽吸输送专用软管，内壁白色TPV（热塑性硫化橡胶）材质，螺旋钢丝和聚酯纤维网双重增强 外壁为绿色TPV，带纵向紫色条纹。内壁光滑，保证介质的流速和无残留。外壁光滑以减少使用时的摩擦和藏污纳垢。

• 可用于吸收和输送酸碱及各种化学品。

Robust hose dedicated to the chemical industry, suitable for suction and delivery. White/beige TPV inline, reinforced with steel spiral and polyester yarn. Green TPV cover with longitudinal violet stripe. The cover is completely smooth to reduce friction and dirt collection while using it.

• For suction and delivery of acids, alcali and chemicals of various kind.

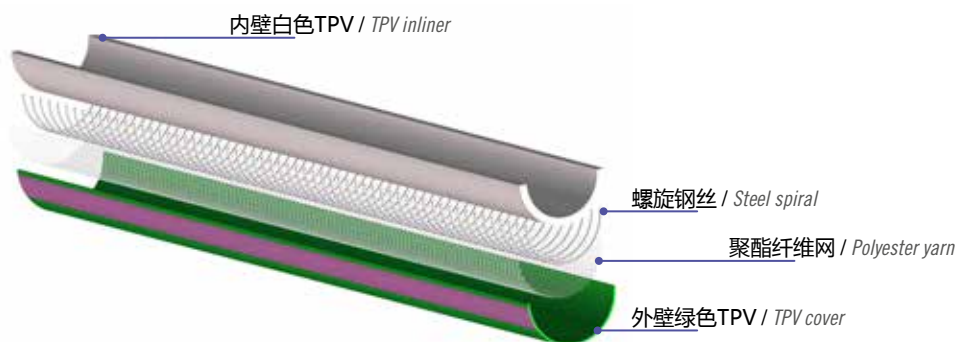

技术参数 / Technical data

代码 Code	内径 Ins. ϕ	外径 Out. ϕ	重量 Weight	工作压 WP	爆破压 BP	负压 Vac.	弯曲半径 Bending	每卷长度 Coil lgth.	体积 Vol.
	mm	mm	g/m	bar	bar	m H ₂ O	mm	m	m ³
PK 01 020.0 029.0	20	29	390	14	42	10	80	60	0,106
PK 01 025.0 035.0	25	35	540	12	36	10	100	60	0,146
PK 01 030.0 040.0	30*	40	630	12	36	9	120	60	0,184
PK 01 032.0 043.0	32	43	730	11	33	9	130	60	0,214
PK 01 038.0 049.0	38	49	850	10	30	9	150	30	0,198
PK 01 040.0 051.0	40*	51	890	10	30	9	160	30	0,202
PK 01 045.0 058.0	45*	58	1285	13	39	8	230	30	0,241
PK 01 050.0 063.0	50	63	1405	12	36	8	250	30	0,286
PK 01 052.0 065.0	52*	65	1455	12	36	8	260	30	0,291
PK 01 060.0 074.0	60*	74	1760	10	30	8	300	30	0,363
PK 01 063.0 077.0	63*	77	1835	10	30	8	320	30	0,379
PK 01 070.0 085.0	70*	85	2115	9	27	7	350	30	0,469
PK 01 076.0 091.0	76*	91	2280	9	27	7	380	30	0,604
PK 01 080.0 095.0	80*	95	2365	9	27	7	400	20	0,498
PK 01 090.0 106.0	90*	106	2875	8	24	7	450	20	0,760
PK 01 102.0 118.0	102*	118	3220	7	21	7	510	20	0,801

* 如有需求，请与我们的销售办事处联系，以获得更多信息和数据 / *Available on request, contact our sales office for more info and quantities
以上数据均在温度23°C和相对湿度50%下测量 / The technical data here reported were measured at 23°C with 50% humidity