


# APOLLO NL 1




灰色增塑型超弹性PVC软管，蓝色防震硬质PVC螺旋加强 因其特殊配方，即使在低温下也能保持高弹性。外壁突出螺旋，减少阻力，便于拖动。内壁光滑，外壁波纹状，耐大气性，耐多种化学品。根据要求可提供抗静电带铜线版本。

农业及废料处理中抽吸排放的优秀方案，如：工业用水、泥浆和液体，特别适用于罐车。

*Grey plasticized PVC hose manufactured with super elastic material and reinforced with anti-shock rigid PVC spiral. Special formulation conceived for keeping high flexibility even at low temperatures. Its exposed spiral allows less resistance to dragging. Inside smooth and corrugated outside, it resists to weather agents and most chemicals. On request, it can be manufactured in antistatic version with copper wire.*

- Waste management, excellent solution for suction and discharge of industrial water, slurries and liquids; particularly suitable to be used on tank trucks.

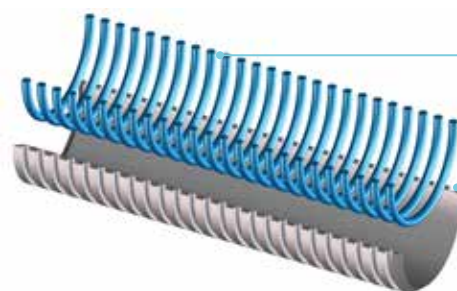

防震硬质PVC螺旋增强  
Anti-shock rigid PVC spiral

PVC软管  
Tubo in PVC / PVC hose

## 技术参数 / Technical data

代码	内径	最小壁厚	最大壁厚	重量	工作压力	爆破压力	耐负压	弯曲半径	每卷长度	体积
Code	Ins. Ø	Min wall th.	Max. wall th.	Weight	WP	BP	Vac.	Bending	Coil lgth.	Vol.
	mm	mm	mm	g/m	bar	bar	m H <sub>2</sub> O	mm	m	m <sup>3</sup>
A1 01 025.0 000.000	25,4*	2,7	3,8	340	5	15	8	130	50	0,106
A1 01 032.0 000.000	31,8*	3	4,3	500	5	15	8	130	50	0,129
A1 01 038.0 000.000	38,1*	3,3	4,8	650	4,2	12,5	8	140	50	0,183
A1 01 050.0 000.000	50*	3,6	5,3	940	3,5	10,5	8	180	50	0,349
A1 01 052.0 000.000	50,8*	3,6	5,3	950	3,5	10,5	8	180	50	0,354
A1 01 063.0 000.000	63,5*	3,9	5,8	1320	3	9	8	230	50	0,433
A1 01 076.0 000.000	76,2*	4,2	6,2	1620	3	9	8	290	50	0,638
A1 01 080.0 000.000	80*	4,3	6,6	1740	2,5	7,5	8	300	30	0,477
A1 01 090.0 000.000	90*	4,4	6,8	2020	2,5	7,5	8	340	30	0,53
A1 01 100.0 000.000	100*	4,8	7,7	2530	2	6	8	380	30	0,886
A1 01 102.0 000.000	102*	4,8	7,7	2580	2	6	7	380	30	0,902
A1 01 110.0 000.000	110*	5,1	7,8	2830	2	6	7	415	30	0,965
A1 01 120.0 000.000	120*	5,1	8,1	3190	2	6	7	450	30	1,046
A1 01 127.0 000.000	127*	5,2	8,2	3430	2	6	7	500	30	1,468
A1 01 150.0 000.000	151,5*	6,1	9,4	4800	1,5	4,5	7	630	20	1,362
A1 01 152.0 000.000	152,4*	6,1	9,4	4830	1,5	4,5	7	630	20	1,370

\* 如有需求,请与我们的销售办公室联系,以获得更多的信息和数据/ \*Available on request,contact our sales office for more info and quantities

以上的报告技术数据均在温度23°C, 50%湿度下测量的 / The technical data here reported were measured at 23°C with 50% humidity