

EOLo




灰色增塑型PVC软管，防震硬质PVC螺旋增强 内壁光滑，外壁波纹状；质轻且非常灵活；可根据需求定制防静电版本。

- 适用于空调通风系统，除尘系统和木工加工装置中，抽吸空气，烟雾，气体，粉末，锯屑和灰尘等。

Grey plasticized PVC hose with anti-shock rigid PVC spiral. Perfectly smooth inside, outside slightly corrugated. Very light and flexible. Antistatic version on request.

- Suction of air, fumes, gas, powders, sawing, dust. Air conditioning and ventilation systems, dust extraction, woodworking processing plants.

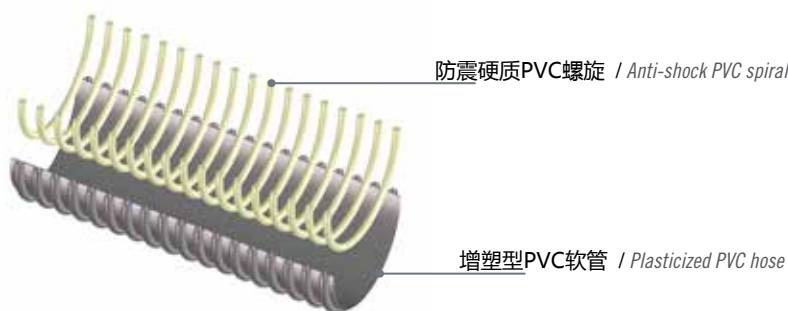

技术参数 / Technical data

代码 Code	内径 Ins. Ø	最小壁厚 Min wall th.	最大壁厚 wall th.	重量 Weight	弯曲半径 Bending	耐负压 Vac.	每卷长度 Coil lgth.	体积 Vol.
	mm	mm	mm	g/m	mm	m H ₂ O	m	m ³
EO 01 013.0 000.0	13*	0,8	2,8	90	20	4,5	30	0,022
EO 01 016.0 000.0	16	0,8	2,8	100	24	4,5	30	0,026
EO 01 019.0 000.0	19,1	0,8	2,8	120	29	4	30	0,031
EO 01 020.0 000.0	20	0,8	2,8	130	30	4	30	0,036
EO 01 022.0 000.0	22*	0,8	2,8	140	33	4	30	0,038
EO 01 025.0 000.0	25	1,0	2,9	180	38	4	50	0,074
EO 01 030.0 000.0	30	1,0	3,0	220	45	3,5	50	0,104
EO 01 032.0 000.0	31,8	1,0	3,1	240	48	3,5	50	0,110
EO 01 035.0 000.0	35	1,0	3,3	270	53	3,5	50	0,140
EO 01 038.0 000.0	38,1	1,0	3,5	310	57	3	50	0,167
EO 01 040.0 000.0	40	1,0	3,5	330	60	3	50	0,182
EO 01 045.0 000.0	45	1,0	3,8	410	68	3	50	0,213
EO 01 050.0 000.0	50	1,0	4,1	490	75	3	50	0,269
EO 01 052.0 000.0	50,8	1,0	4,1	500	76	3	50	0,273
EO 01 055.0 000.0	55*	1,0	4,2	560	83	3	50	0,304
EO 01 060.0 000.0	60	1,0	4,2	600	90	3	50	0,368
EO 01 063.0 000.0	63,5	1,0	4,2	640	95	3	50	0,387
EO 01 065.0 000.0	65	1,0	4,2	650	98	3	50	0,409
EO 01 070.0 000.0	70	1,2	4,5	700	105	3	50	0,551
EO 01 076.0 000.0	76,2	1,2	4,6	790	114	2,5	50	0,632
EO 01 080.0 000.0	80	1,2	5,1	900	120	2,5	50	0,667
EO 01 090.0 000.0	90*	1,2	5,3	1060	135	2,5	30	0,449
EO 01 100.0 000.0	100	1,2	5,8	1250	150	2,5	30	0,656
EO 01 102.0 000.0	102	1,2	5,8	1280	153	2,5	30	0,668
EO 01 110.0 000.0	110	1,3	5,9	1380	164	2,5	30	0,758
EO 01 120.0 000.0	120	1,3	5,9	1500	177	2,5	30	0,843
EO 01 127.0 000.0	127	1,3	6,0	1630	186	2,5	30	0,913
EO 01 130.0 000.0	130*	1,3	6,0	1660	190	2,5	30	0,959
EO 01 140.0 000.0	140	1,3	6,1	1830	203	2	30	1,055
EO 01 150.0 000.0	151,5	1,3	6,4	2000	217	2	20	0,966
EO 01 152.0 000.0	152,4*	1,3	6,4	2010	219	2	20	0,971
EO 01 160.0 000.0	160*	1,5	7,0	2200	228	1,5	20	1,053
EO 01 180.0 000.0	180*	1,5	7,0	2470	252	1,5	20	1,241
EO 01 200.0 000.0	200	1,5	7,3	2730	275	1,5	20	1,449
EO 01 203.0 000.0	203,2*	1,5	7,3	2780	279	1,5	20	1,470
EO 01 250.0 000.0	250*	1,5	7,6	3600	328	1	10	0,953
EO 01 300.0 000.0	300*	1,5	7,8	4460	375	1	10	1,459

以上数据均在23°C，50%湿度下测量 / The technical data here reported were measured at 23°C with 50% humidity

如有需求，请联系我们的销售办公室，以获得更多的信息和数据 / *Available on request, contact our sales office for more info and quantities