


NETTUNO FF



半透明PVC软管，防震硬质PVC螺旋增强；内壁光滑，确保流动性能；质轻且灵活；食品级管壁；可根据需求定制防静电带铜线版本。


• 适用于食品行业中抽吸输送食品粉末，如：面粉，轻质谷物和冻干食品；也同样可以输送常规液体，如：饮料，果汁，醋，葡萄酒以及酒精浓度高达50%的烈酒，牛奶及其他乳制品。

符合欧盟EU Reg.10/2011 (classes A,B, C, D1)食品级标准

Transparent PVC hose with an ivory anti-shock rigid PVC spiral; smooth inside to ensure optimization of flow properties. Light and flexible. Foodgrade hose wall. Antistatic version with copper wire on request.

• Food industry: suction and delivery of food powders like flours, light grains, freeze dried foodstuffs as well as for liquids in general (beverages, juices, vinegar, wines and liquours with alcohol concentration up to 50%, milk and dairies).

Food grade according to EU Reg.10/2011 (classes A,B, C, D1).

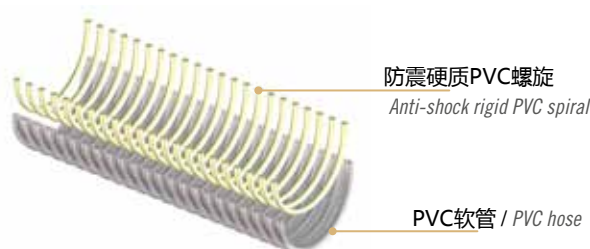

防震硬质PVC螺旋

Anti-shock rigid PVC spiral

PVC软管 / PVC hose

技术参数 / Technical data

代码	Ins. Ø	Min wall th.	Max. wall th.	Weight	WP	BP	Vac.	Bending	Coil lgth.	Vol.
Code	mm	mm	mm	g/m	bar	bar	m H ₂ O	mm	m	m ³
NQ 01 013.0 000.0	13	2,4	2,7	150	10,0	30	7	75	50	0,040
NQ 01 016.0 000.0	16	2,5	2,8	190	8,0	24	7	90	50	0,047
NQ 01 019.0 000.0	19,1*	2,6	2,9	230	7,0	21	7	110	50	0,054
NQ 01 020.0 000.0	20	2,6	2,9	240	7,0	21	7	110	50	0,056
NQ 01 025.0 000.0	25	2,6	2,9	290	6,0	18	7	130	50	0,078
NQ 01 030.0 000.0	30	2,7	3,0	360	5,0	15	7	150	50	0,115
NQ 01 032.0 000.0	31,8	2,7	3,0	380	5,0	15	7	155	50	0,121
NQ 01 035.0 000.0	35	2,7	3,2	440	4,0	12	7	170	50	0,161
NQ 01 038.0 000.0	38,1	2,9	3,5	510	4,0	12	7	180	50	0,175
NQ 01 040.0 000.0	40	3,0	3,5	560	4,0	12	7	195	50	0,183
NQ 01 045.0 000.0	45	3,2	3,8	680	4,0	12	7	215	50	0,238
NQ 01 050.0 000.0	50	3,3	4,2	810	4,0	12	7	235	50	0,264
NQ 01 052.0 000.0	50,8	3,3	4,2	820	4,0	12	7	235	50	0,268
NQ 01 055.0 000.0	55*	3,4	4,3	910	4,0	12	7	255	50	0,370
NQ 01 060.0 000.0	60	3,4	4,2	990	4,0	12	7	275	50	0,498
NQ 01 063.0 000.0	63,5	3,4	4,3	1060	4,0	12	7	290	50	0,525
NQ 01 065.0 000.0	65*	3,5	4,4	1120	4,0	12	7	300	50	0,537
NQ 01 070.0 000.0	70	3,7	4,6	1220	3,0	9	7	320	50	0,691
NQ 01 076.0 000.0	76,2	3,9	4,8	1400	3,0	9	7	340	50	0,748
NQ 01 080.0 000.0	80	4,2	5,2	1550	3,0	9	7	365	50	0,932
NQ 01 090.0 000.0	90	4,4	5,5	1860	3,0	9	7	420	30	0,782
NQ 01 100.0 000.0	100	4,8	6,0	2240	3,0	9	7	470	30	0,866
NQ 01 102.0 000.0	102	4,8	6,0	2280	3,0	9	7	470	30	0,882
NQ 01 110.0 000.0	110	5,0	6,3	2560	3,0	9	6	520	30	1,264
NQ 01 120.0 000.0	120	5,1	6,4	2840	3,0	9	6	650	30	1,069
NQ 01 127.0 000.0	127	5,2	6,5	3060	3,0	9	5,5	680	30	1,690
NQ 01 150.0 000.0	151,5	6,1	7,6	4390	3,0	9	5	780	20	1,343
NQ 01 152.0 000.0	152,8*	6,1	7,6	4420	3,0	9	5	780	20	1,354
NQ 01 200.0 000.0	200*	6,5	9,3	6520	2,0	6	4,5	1000	10	2,130
NQ 01 203.0 000.0	203,2*	6,5	9,3	6620	2,0	6	4,5	1000	10	2,161
NQ 01 250.0 000.0	250*	6,8	9,7	8600	1,5	4,5	4	1800	待定 /On request	
NQ 01 254.0 000.0	254*	6,8	9,7	8730	1,5	4,5	4	1800	待定 /On request	
NQ 01 300.0 000.0	300*	7,2	10,3	11030	1,0	3	4	2000	待定 /On request	
NQ 01 305.0 000.0	305*	7,2	10,3	11200	1,0	3	4	2000	待定 /On request	

* 如有需求，请与我们的销售办公室联系，以获得更多的信息和数据 / *Available on request,contact our sales office for more info and quantities

以上的报告技术数据均在温度23°C，50%湿度下测量的 / The technical data here reported were measured at 23°C with 50% humidity