

# APOLLO SUPERFLEX 2



+50° C


-40° C

黑色聚氯乙烯/丁腈橡胶(PVC/NBR)软管, 灰色防震硬质PVC螺旋增强 因其特殊配方, 低温下仍保持弹性, 优于同类型PVC软管; 外壁轻微突出螺旋, 便于地面拖动; 可根据需求提供防静电带铜线版本。

• 适用于废料处理、农业中液体的抽吸和输送。

*Black PVC/NBR hose reinforced with a grey anti-shock rigid PVC spiral. Special formulation conceived for keeping the flexibility at extreme temperatures, better than similar PVC hoses commonly used; profile with a slightly protruding spiral to guarantee an easy dragging on the ground. Antistatic version with copper wire on request.*

• Waste Management, agriculture:suction and transport of liquids.

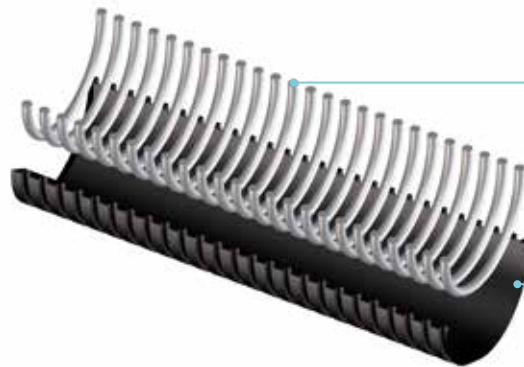

防震硬质PVC螺旋

*Anti-shock rigid PVC spiral*

PVC/NBR软管 / PVC/NBR hose

### 技术参数 / Technical data

代码	内径	最小壁厚	最大壁厚	重量	工作压力	爆破压力	耐负压	弯曲半径	每卷长度	体积
Code	Ins. Ø	Min wall th.	Max. wall th.	Weight	WP	BP	Vac.	Bending	Coil lgth.	Vol.
	mm	mm	mm	g/m	bar	bar	m H <sub>2</sub> O	mm	m	m <sup>3</sup>
SF 01 052.0 000.0	50,8	4,43	4,91	970	2	10	7	160	50	0,349
SF 01 063.0 000.0	63,5	4,9	5,5	1380	1,8	9	7	210	50	0,429
SF 01 065.0 000.0	65*	5	5,7	1440	1,8	9	7	210	50	0,439
SF 01 076.0 000.0	76,2	5,1	5,8	1670	1,8	9	7	250	50	0,632
SF 01 080.0 000.0	80	5,05	6,444	1930	1,5	7,5	7	270	50	0,719
SF 01 090.0 000.0	90	5,24	6,649	2220	1,5	7,5	7	300	30	0,532
SF 01 102.0 000.0	102	5,9	7,24	2770	1,3	6,5	6	335	30	0,900
SF 01 105.0 000.0	105*	6	7,24	2870	1,3	6,5	6	335	30	0,923
SF 01 110.0 000.0	110	6,1	7,54	2990	1,2	6	6	360	30	0,962
SF 01 127.0 000.0	127	6,3	7,82	3540	1,1	6	6	410	30	1,460
SF 01 152.0 000.0	152,4	7,36	9	5000	0,9	5	6	500	20	1,363

\* 如有需求, 请与我们的销售办公室联系, 以获得更多的信息和数量 / \*Available on request, contact our sales office for more info and quantities

以上报告的技术数据均在温度23°C, 50%湿度下测量 / The technical data here reported were measured at 23°C with 50% humidity