

# VULCANO PU AS-UL 94 PLUS




透明聚醚型聚氨酯材质，镀铜钢丝螺旋增强。因特殊TPU复合材质，结合多种性能使得管壁抗静电（ $R < 10^8$ 欧姆/米）；抗微生物抗水解，抗紫外线，恒定壁厚0.5mm，良好的压缩性（压缩比5:1）；符合UL94-V0阻燃等级，软管两端螺旋钢丝接地来导电。

- 适用于锯木厂、轻型抽吸设备中抽吸木屑和锯末；也可作保护套管。

*Transparent ether based Polyurethane hose, reinforced with a TPU copper coated steel spiral; it is made by a special TPU that combines different properties which make the wall material permanent antistatic ( $R < 10^8$  Ohm/metre); resistant to microbes and Hydrolysis, as well as to UV. Constant wall thickness of 0,5 mm. Compressible (5:1). The special TPU is flame retardant in accordance with UL 94-V0. It can be made conductive by earthing the steel spiral.*

- Suction of wood shavings and sawdust, in sawmills, small vacuum cleaning, light suction plants; it can be used as protection sleeve.

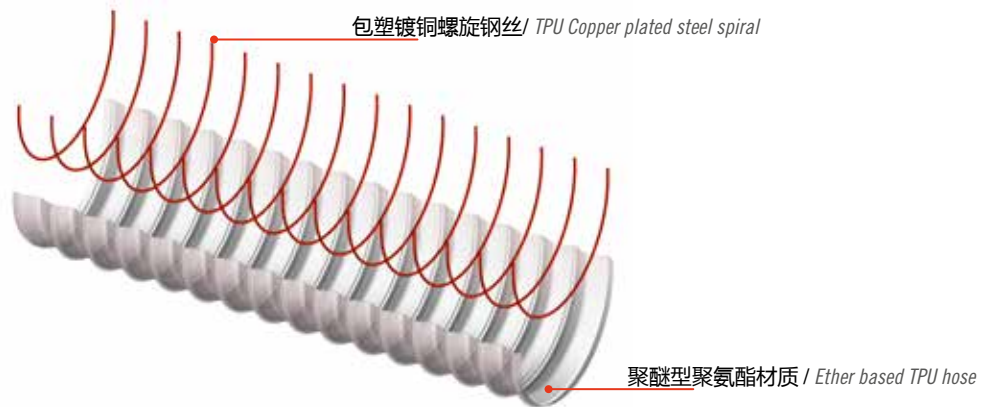

技术参数 / Technical data

代码 Code	内径 Ins. $\phi$	最小壁厚 Min wall th.	最大壁厚 Max. wall th.	压力 Weight	弯曲半径 Bending	耐负压 Vac.	工作压力 WP	爆破压力 BP	每卷长度 Coil lgth.	体积 Vol.
	mm	mm	mm	g/m	mm	m H <sub>2</sub> O	bar	bar	m	m <sup>3</sup>
UF 07 025.0 000.0	25*	0,5	2,2	140	17	0,8	1,8	5,0	20	0,050
UF 07 032.0 000.0	32	0,5	2,2	175	21	0,8	1,8	5,0	20	0,060
UF 07 040.0 000.0	40	0,5	2,2	195	27	0,5	1,5	4,5	20	0,070
UF 07 051.0 000.0	51	0,5	2,5	270	34	0,5	1,2	3,6	20	0,110
UF 07 060.0 000.0	60*	0,5	2,5	310	40	0,5	1,2	3,6	20	0,130
UF 07 065.0 000.0	65*	0,5	2,5	335	43	0,5	1	3,0	20	0,190
UF 07 076.0 000.0	76	0,5	2,5	385	51	0,5	0,8	2,4	20	0,220
UF 07 090.0 000.0	90*	0,5	2,5	450	60	0,5	0,8	2,4	20	0,290
UF 07 100.0 000.0	100*	0,5	2,7	495	67	0,3	0,8	2,4	20	0,480
UF 07 102.0 000.0	102	0,5	2,7	500	68	0,3	0,8	2,4	20	0,330
UF 07 120.0 000.0	120*	0,5	2,7	585	80	0,3	0,6	1,8	15	0,380
UF 07 127.0 000.0	127*	0,5	2,7	615	85	0,3	0,6	1,8	15	0,400
UF 07 152.0 000.0	152*	0,5	2,7	875	101	0,25	0,4	1,2	15	0,720
UF 07 160.0 000.0	160*	0,5	3,0	915	107	0,3	0,4	1,2	15	0,760
UF 07 203.0 000.0	203*	0,5	3,0	1150	135	0,15	0,3	0,9	15	1,120
UF 07 254.0 000.0	254*	0,5	3,0	1425	169	0,1	0,2	0,6	可定制/On request	

\* 如有需求，请与我们的销售办公室联系，以获得更多的信息和数据 / \* Available on request, contact our sales office for more info and quantities

以上技术数据均在温度23°C，50%湿度下测量 / The technical data here reported were measured at 23°C with 50% humidity