


PLUTONE PW





黑色带黄色条纹软管，特殊PVC复合材质，螺旋钢丝和聚酯纤维网双重增强 内外壁光滑，柔韧，易操作。耐低温。

- 适用于抽吸输送水及其他液体。

Black hose with yellow stripe made by a special PVC compound, with steel helix and polyester textile reinforcement.

Smooth, flexible and easy to handle, it resists at low temperatures.

- *Suction and discharge of water and liquids.*

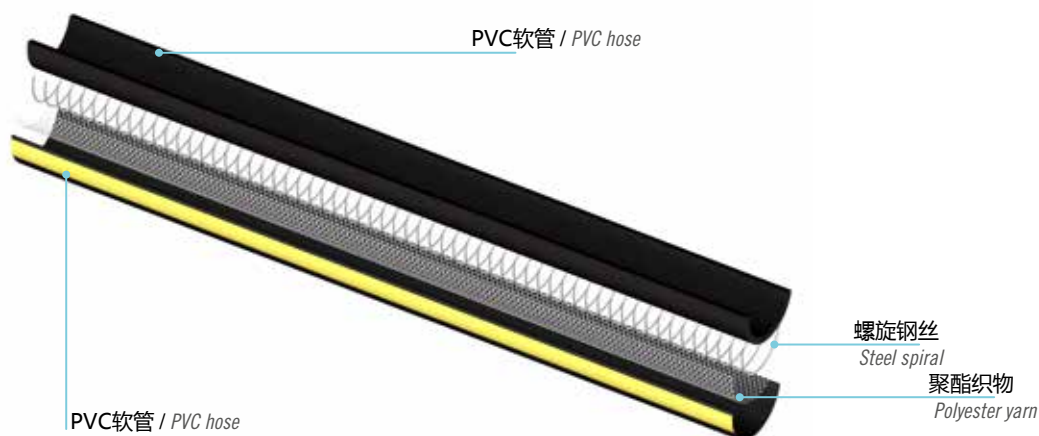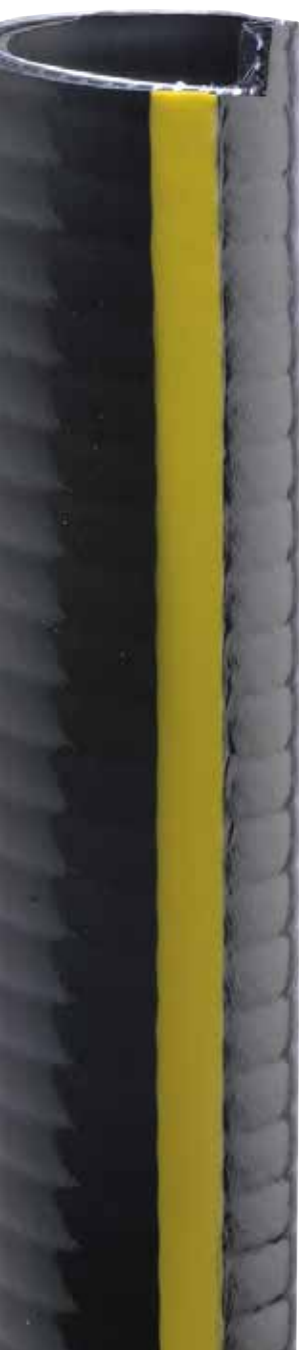

Scheda tecnica / Technical data

代码	内径	外径	重量	工作压力	耐负压	弯曲半径	每卷长度	体积
Code	Ins. Ø	Out Ø	Weight	WP	Vac.	Bending	Coil lgth.	Vol.
	mm	mm	g/m	bar	m H ₂ O	mm	m	m ³
PW 01 020.0 029.0	20*	29	475	14	10	80	60	0,106
PW 01 025.0 035.0	25	35	655	12	10	100	60	0,146
PW 01 030.0 040.0	30	40	765	11	9	120	60	0,184
PW 01 032.0 043.0	32*	43	890	11	9	130	60	0,214
PW 01 035.0 046.0	35*	46	960	11	9	140	60	0,225
PW 01 038.0 049.0	38*	49	1035	10	9	150	30	0,198
PW 01 040.0 051.0	40	51	1080	10	9	160	30	0,202
PW 01 045.0 058.0	45*	58	1505	10	9	180	30	0,241
PW 01 050.0 063.0	50	63	1685	10	8	250	30	0,286
PW 01 060.0 074.0	60*	74	2115	10	8	300	30	0,363
PW 01 063.0 077.0	63*	77	2210	10	8	320	30	0,379
PW 01 076.0 091.0	76*	91	2730	10	7	380	30	0,603
PW 01 080.0 095.0	80*	95	2840	9	7	400	20	0,498
PW 01 102.0 118.0	102*	118	3890	7	7	510	20	0,801

*如有需求，请与我们的销售办公室联系，以获得更多的信息和数据 / *Available on request, contact our sales office for more info and quantities

以上技术数据均在温度23°C，50%湿度下测量 / The technical data here reported were measured at 23°C with 50% humidity