


NETTUNO PU FF




半透明PVC软管，聚醚型PU内衬，防震硬质PVC螺旋增强 内壁光滑，质轻且非常灵活；可根据需求定制防静电带铜线版本

- 抽吸输送食品的理想方案，如：面粉，轻质谷物，冻干食品以及酒精浓度不超过20%的饮料。
符合EU Regulation n° 10/2011 (classes A, B, C, D2) 食品级标准。

Transparent PVC hose with an ether based Polyurethane liner, reinforced with an ivory anti-shock rigid PVC spiral; completely smooth inside, light and very flexible. Antistatic version with copper wire on request.

- *Ideal solution for suction and delivery of food powders like flours, light grains, freeze dried foodstuffs. For beverages with alcohol concentration up to 20%.*
Food grade according to EU Regulation n° 10/2011 (classes A, B, C, D2).

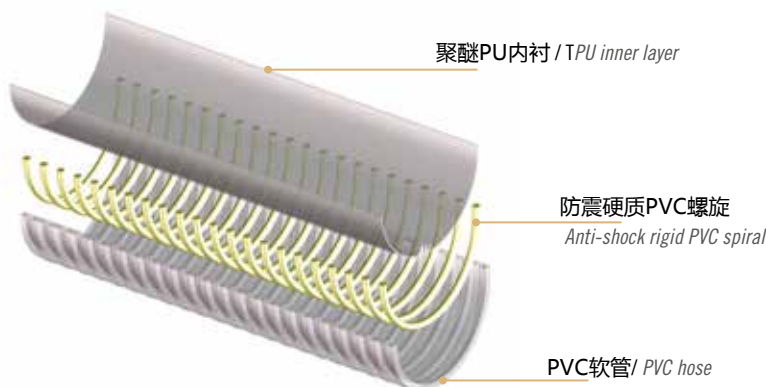

技术参数 / Technical data

代码	内径	最小壁厚	最大壁厚	重量	工作压力	爆破压力	耐负压	弯曲半径	每卷长度	体积
Code	Ins. Ø	Min wall th.	Max. wall th.	Weight	WP	BP	Vac.	Bending	Coil lgth.	Vol.
	mm	mm	mm	g/m	bar	bar	m H ₂ O	mm	m	m ³
NR 01 030.0 000.0	30*	2,8	3,3	380	5	15	7	150	30	0,071
NR 01 032.0 000.0	31,8	2,9	3,4	420	5	15	7	155	30	0,100
NR 01 035.0 000.0	35*	3,0	3,5	470	5	15	7	170	30	0,109
NR 01 038.0 000.0	38,1	3,1	3,7	530	5	15	7	185	30	0,118
NR 01 040.0 000.0	40	3,1	3,8	560	5	15	7	195	30	0,123
NR 01 045.0 000.0	45*	3,1	4,1	660	5	15	7	215	30	0,137
NR 01 050.0 000.0	50	3,3	4,5	790	5	15	7	235	30	0,257
NR 01 052.0 000.0	50,8	3,3	4,5	800	5	15	7	235	30	0,260
NR 01 055.0 000.0	55*	3,4	4,6	890	5	15	7	255	30	0,279
NR 01 060.0 000.0	60	3,4	4,6	970	5	15	7	275	30	0,301
NR 01 063.0 000.0	63,5	3,5	4,6	1040	5	15	7	290	30	0,316
NR 01 070.0 000.0	70*	3,7	4,9	1180	5	15	7	320	30	0,411
NR 01 076.0 000.0	76,2	3,9	5,2	1380	5	15	7	340	30	0,445
NR 01 080.0 000.0	80*	4,1	5,5	1510	4	12	7	365	30	0,468
NR 01 090.0 000.0	90*	4,4	5,8	1830	4	12	7	420	30	0,522
NR 01 100.0 000.0	100*	4,7	6,3	2170	4	12	7	470	30	0,868
NR 01 102.0 000.0	102	4,7	6,3	2210	4	12	7	470	30	0,883
* 如有需求，请与我们的销售办公室联系，以获得更多的信息和数据/ *Available on request, contact our sales office for more info and quantities										
以上的报告技术数据均在温度23°C，50%湿度下测量的 / The technical data here reported were measured at 23°C with 50% humidity										